

MODEL P702-59

Automatic Strapping Machine

FEATURES

- Up to 65 straps per minute
- 5 mm, 6 mm or 9 mm Polypropylene Strapping
- High performance DC brushless motor technology
- Precision electronic tension
- Loop ejector
- Coil end strap ejector
- Anti jam technology
- Compact frame with internal strapping dispenser
- Auto strap loading at waist height
- Foot bar, photo eye and panel switch are all standard on every machine
- Track design insures precision strap placement
- Roller table tops standard on 33" wide sizes and up



LINC
SYSTEMS

800.513.9918 | LINCsystems.com

YOUR SUCCESS IS OUR BUSINESS

SAMUEL
1865
PACKAGING SYSTEMS GROUP

For more information, visit www.LINCsystems.com

MODEL P702-59

Automatic Strapping Machine

STANDARD FEATURES

The P702 is a world class high speed automatic strapping machine. It features several creative designs that make it the most operator friendly machine in its class.

The operator control panel is hinged to allow access from either side of the machine. The Smart LCD display offers enhanced diagnostics and the ability to make adjustments.

The compact frame of the P702-59 features an inside mount strap dispenser that hinges up for auto strap loading at waist height. The new quick release dispenser flange lock knob makes coil changes faster.

All P702 series machines have a hinged open top plate for easy access to the strapping head. They also feature quick release feed guides for immediate access to the strap feed system with the need for tools.

AVAILABLE OPTIONS

- Stainless Steel Frame
- Press Assembly
- Foot Switch
- High Tension for 9 mm Model

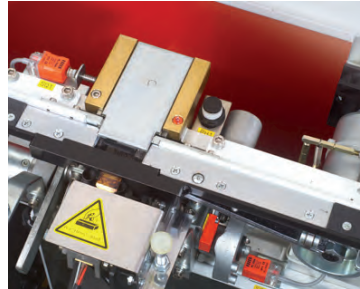


Photo Eye



Internal Dispenser



Hinged Open Tops



Adjustable Height

SPECIFICATIONS

Width*	940 mm	37"
Height*	1422 mm	56"
Depth*	660 mm	26"
Shipping Weight	204 kg	450 lbs
Table Height	819 - 921 mm	32 1/4" - 36 1/4"
Minimum Pkg. Size	W 64 x H 25 mm	W 2 1/2" x H 1"
Maximum Pkg. Size	Arch Width x Arch Height	
Strapping Speed	Up to 65 cycles per minute	
Strapping Used	5, 6, 9 mm	1/4", 3/8"
	Embossed or Smooth Strapping	
Tensioning Range	1 - 32 kg	2 - 70 lbs
Power Supply	110 V (220, 230) Single Phase	

*Dimensions for 21" x 15" Arch size.

© 122273-P702-August/17

Specifications are for guidance purposes only and subject to change without notice.

STANDARD ARCH SIZES

Height \ Width	533 (21)	650 (25)	850 (33)	1050 (41)	1250 (49)	1626 (64)
400 (15)	X		X			
500 (19)		X	X			X
600 (23)			X			
800 (31)			X	X	X	
1000 (39)				X	X	

Size in mm/(inches)



800.513.9918 | LINCsystems.com