

SEAL•A•TRON

Shrink Packaging Equipment

LINC
SYSTEMS

800.513.9918 | LINCsystems.com



Featuring
Our NEW
**ELECTRONIC
SEAL STROKE**



SEGMENT 1

AS-2024AC AUTOMATIC L-BAR


Standard Features:

- Electronic Seal Stroke with Variable Height Controls
- Digital PLC Controls
- 6" Color HMI Screen
- Variable Frequency Driven Motor Controls
- Positive Film Assist for Feeding Packages
- V-Grooved Conveyor Belts Reducing Belt Wear
- Safety Interlocks
- Proximity Sensor for Reliable Performance
- Package Staging
- Motorized Center Seal Adjustment
- Horizontal Photo Eye
- Auto Reverse for Tall Packages
- Easy Access Film Scrap Take Up
- Power Required:
220 VAC, Single Phase, 20Amps

Seal Bar Dimensions: 20"W x 24" L x 9"H
Minimum Package: 2"W x 3" L x ¼"H
Maximum Package: 17"W x 20" L x 8" (consult factory)
Maximum Film Roll: 26" Centerfold



Easy Access Film Scrap Wind-up

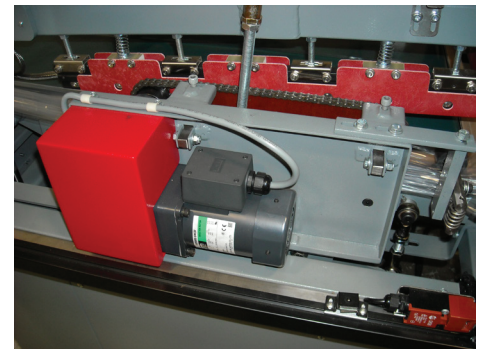

Positive Drive Film Feed (Feeds thin gauge films)

For more information, visit www.LINCsystems.com