

V-FORCE 2 UNI

NUMERIC UNDERPINNER

Designed for

Bespoke
Framer

Retail
Framer

Medium
Contract Framer

Volume
Contract Framer



Electric supply

110 / 230V single phase
50 / 60 Hz
0,5Kw



The V-FORCE 2 UNI works with **UNI wedges**

Speed

Moulding capacity

Ease of use

Space required



THE V-FORCE 2 UNI FROM CASSE

is a numeric underpinner (v-nailer) with high speed joining capacity.

The V-FORCE 2 UNI is easy to use thanks to its user-friendly touchscreen and its quick and easy joining set up.

The V-FORCE 2 UNI can join high and wide mouldings while ensuring a perfect joining quality thanks to the retractable tightening clamps system.


To improve your production time, you can register up to 3 000 favorites moulding profiles with iconic identification.

The V-FORCE 2 UNI uses "UNI" wedges and has an easy system for loading the wedges in order to minimize the loss of time.

NEW OPTIONNAL ACCESSORY The S.M.C. System (Smart Moulding Configuration)




Thanks to a cutting-edge laser, you can scan your moulding and the machine will suggest you the best positions, numbers and size of wedges needed.

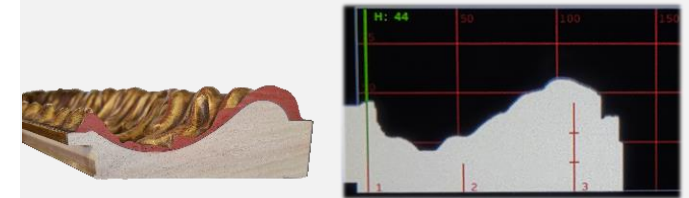

DIMENSIONS

Length	650 mm
Width	600 mm
Height	1150 mm

MOULDING CAPACITY (mm)

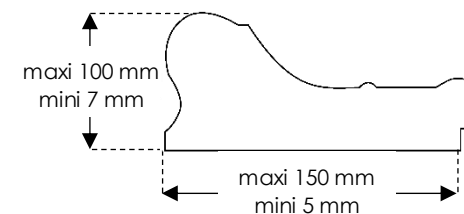

AIR SUPPLY


6 bars

1 L / wedge


WEIGHT 103 kg

MADE IN
FRANCE


The Smart Wedge Drive System™




Auto-alignment
No need to adjust top clamp placement



Self-adjusting pressure
No need to adjust air pressure between Hardwood and Softwood

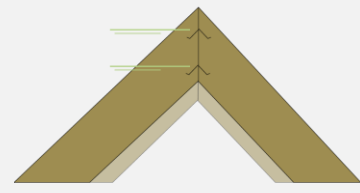

High speed joining = 3360 cycles / hour
(with 2 positions per corner)

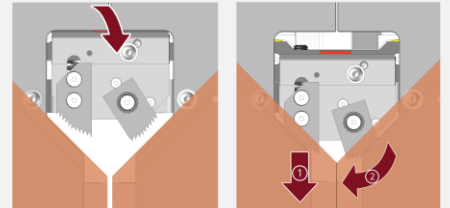

Retractable and very powerful Ultra™ clamps (patented)

NEW INTERFACE AND CUTTING-EDGE ELECTRONICS BY SCHNEIDER ELECTRIC (DRIVER, SCREEN, PROGRAM CONTROLLER)



User-friendly touchscreen and easy to use menus




Quick and Easy joining set up with iconic identification




Complete tutorial to guide you step by step





9 wedge positions 9 wedges per position




3 000 Favorites Profiles
(Import your MACH profiles)




Barcode Ready
(compatible with MACH, CS486, CS3099 & CS4008 joining files)



Adjustable rod clamp
Magnetic chevron clamp
Solid crossbar



Concrete reinforced structure to absorb vibrations

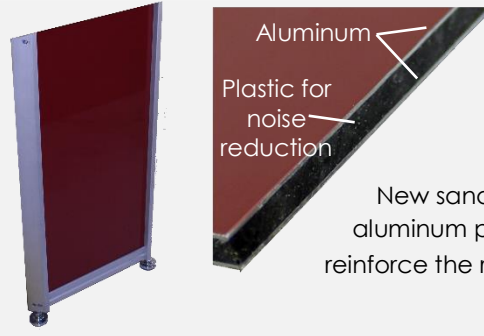


Aluminum
Plastic for noise reduction
New sandwich aluminum panel to reinforce the robustness

INCLUDED ACCESORIES




- Z3078
- Z26999
- Z24322
- Z24703
- Z26809
- Z21525
- Z21524
- Z18065
- Z1783
- Z1791
- 7mm Z25497
- 10mm Z25498
- 12mm Z25499
- 15mm Z25500
- Z25975
- 1 box of 10mm SW
- 1 box of 10 mm HW
- (boxes of 8.000 wedges)

OPTIONAL ACCESORIES

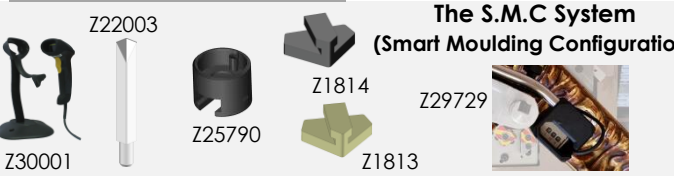

- Z30001
- Z22003
- Z25790
- Z1814
- Z1813
- Z29729

The S.M.C System
(Smart Moulding Configuration)




CASSESE SARL - 8 rue Denis Papin ZI
77390 Verneuil l'Etang - FRANCE
Tél. : +33 (0) 1 64 42 49 71/73
Email : sales@cassese.com